

# paddle mixer

Model: RE 100



Paddle Mixer type is designed for fast and precise mixing for meat-mass production in meat processing factories. Can also be used for mixing products such as spices or tea.

## Suitable products:

- Meat
- Salads
- Spices
- Tea




# paddle mixer

Model: RE 100



This machines use a dual system of mixing paddles which allows for precise and steady mixing of all meatmass ingredients.

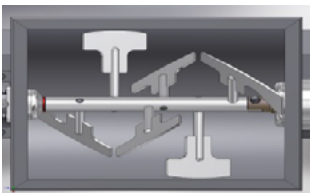

Mixers have a variable direction of rotation of paddles and variable speed of mixing by using inverter. Whole machine is made of stainless steel which allows to keep the machine clean.




## Main construction features:

One mixing paddle for 90L and 150L mixers, Dual system of mixing paddles for mixers of capacity 200L, 300L and 400L, and dual shaft system of mixing paddles for 600L, 850L, 1250L, 2000L and 3000L, smoothly adjustable mixing speed (inverter installed), variable directions of paddle rotation, 100% of stainless steel, manual tilt of mixer during unloading for mixers 90, 150, 200 and 300L, manual loading and unloading system with magnetic sensor for 400L, adaptation to standard 200 liter trolley for meat-mass for mixers of capacity of 400L, 600L, 850L, 1250L, 2000L, 3000L.

Pneumatic loading and unloading system for 400, 600, 850L, 2000L mixers. 1250L mixers have two ejecting holes of meat-mass, loading and emptying valves opened and closed pneumatically, loading pillar (optional). All mixers are easy to operate. 3000L mixer has a water dosing system, load cells system, two outlets of meat-mass, Loading pillar (optional), manual or automatical control of mixing, electrical installation is located in box on the side of the machine, 100% of stainless steel.

# paddle mixer

Model: RE 100

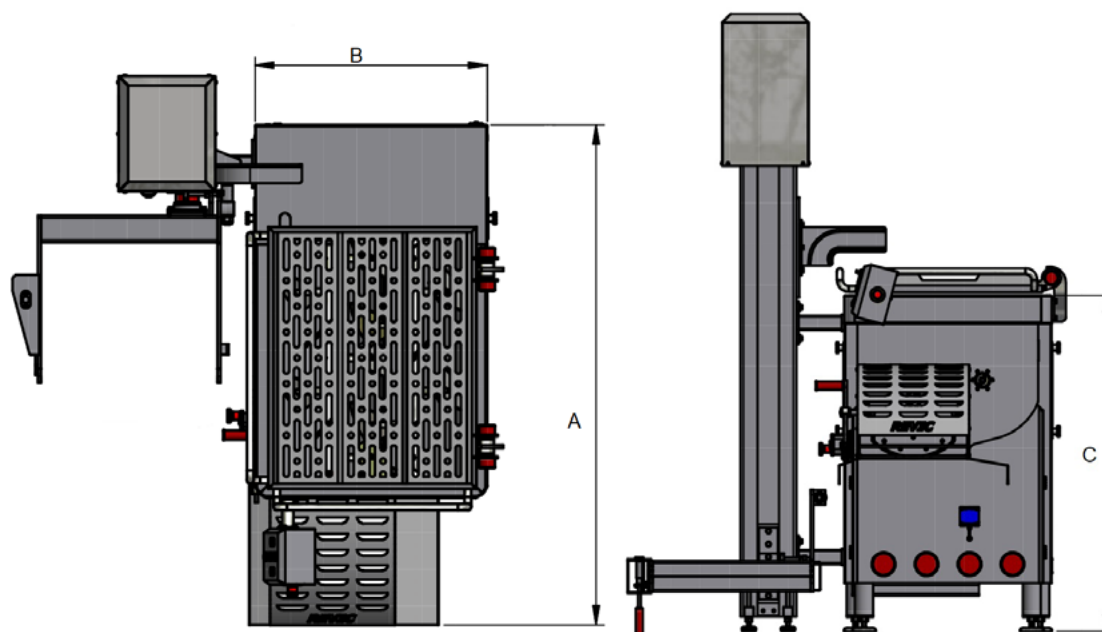

Volume L	90	150	200	300	400
LxWxH mm	1285x705x1240	1566x1004x1401	1566x1004x1421	1830x840x1444	1870x870x1526
Installed power[kW]	1,1	1,5	3	3	4
Max.input[kg]	70	110	160	240	320
Voltage [V/Hz]	3x400/50	3x400/50	3x400/50	3x400/50	3x400/50
Weight [kg]	140	180	540	650	700
Rotations [r/min]		5-40	5-48	5-48, inverter	5-48

Volume L	600	850	1250	2000	3000
LxWxH mm	2176x970x1740	2400x1090x1810			
Installed power[kW]	7,5	10	2x 5 kW	2 x 8 = 16	2x 8,5 kW
Max.input[kg]	480	700	1000	1400	2400
Voltage [V/Hz]	3x400/50	3 phases 400/50	400/50	3x400/50	3x400/50
Weight [kg]	900	1100	1800	3000	3700
Rotations [r/min]	5-48	5-48		20/40	
Supply pressure of pneumatics [bar]	6	6	4	6	4

NORMIT FOOD, s. r. o.  
Pezinská cesta 5104  
901 01 Malacky, SLOVAKIA

Skype:  
manager.normit

Telephone number:  
+421 902 400 321

E-mail:  
sales@normit.com

Web:  
www.normit.com